



248 - Chasse-goupilles monobloc



Description :

- Traitement thermique assurant une dureté de 53 à 55 HRc.
- Présentation : corps octogonal, tige en acier haute résistance.
- Finition : zinguée.

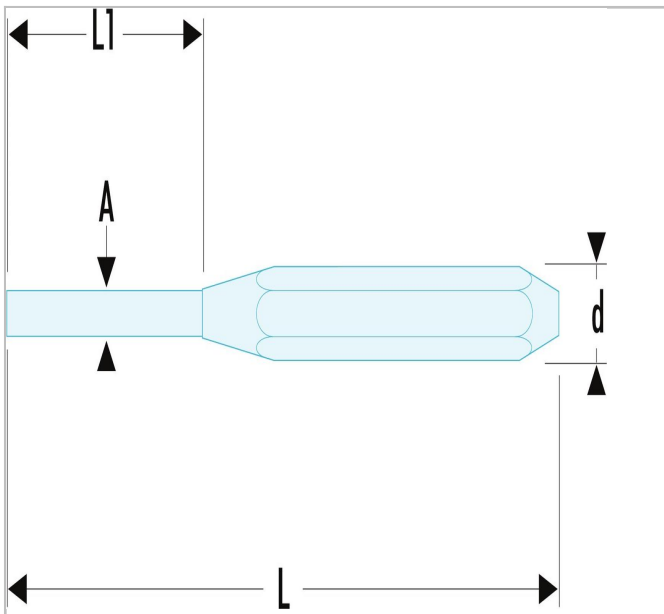

	A [mm]	Diamètre [mm]	longueur [mm]	Longueur L1 [mm]	BITS ["]	Poids [g]
248.10	9.9	12.0	150.0	50.0		120
248.2	1.9	8.0	150.0	30.0		45
248.3	2.9	8.0	150.0	40.0		50
248.4	3.9	10.0	150.0	50.0	Slotted head: 1,8 - 2,5 ; PH: 0,9 - 1,3 - 1,5 - 2 mm ; PZ: 0 - 1 - 2 mm	55
248.5	4.9	10.0	150.0	50.0	Slotted head: 4 - 4,5 - 5,5 ; PH: 1,5 - 2,5 - 3 mm ; PZ: 0 - 1 mm	65
248.6	5.9	10.0	150.0	50.0	Slotted head: 4,5 - 6,5 - 8 ; 6-point: 3 - 4 - 5 mm ; PZ: 1 - 2 - 3 mm	70
248.8	7.9	12.0	150.0	50.0	Slotted head: 4,5 -	100

					6,5 - 8 ; 6- point: 3 - 4 - 5 mm ; PZ: 1 - 2 - 3 mm	
--	--	--	--	--	--	--