

66A - Metric hinged combination wrenches





Standards:

NF ISO 1711-1, NF ISO 691, ISO 1711-1, ISO 691, DIN ISO 1711-1, DIN ISO 691

Description:

- Hinged socket wrenches: the socket can be turned by 180° for maximum access.
- The socket is held in position tanks spring locking.
- OGV® profile with 12-point ring for powerful tightening while protecting the nut.
- Metric sizes: 6 to 23 mm.
- Presentation: satin chrome finish.

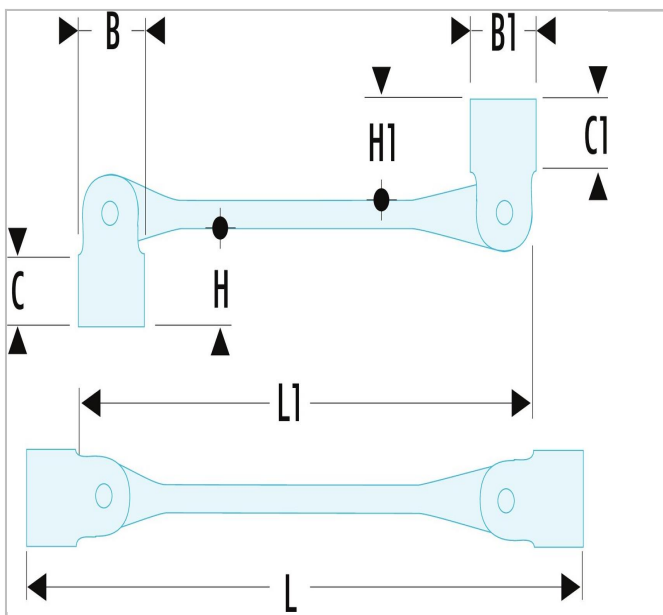

	A [mm]	Length L [mm]	Length L1 [mm]	Head Height C [mm]	Head Height C1 [mm]	Head Width B [mm]	Head Width B1 [mm]
66A.10X11	10x11	194.5	156.0	18.0	18.0	15.0	16.5
66A.10X13	10x13	233.5	189.5	21.0	21.0	15.0	19.0
66A.12X13	12x13	233.5	189.5	21.0	21.0	17.5	19.0
66A.14X15	14x15	237.5	231.0	23.0	23.0	20.5	21.75
66A.16X17	16x17	280.0	231.0	23.0	23.0	23.0	24.0
66A.18X19	18x19	286.0	231.0	24.0	28.0	24.7	26.0
66A.6X7	6x7	188.5	156.0	15.0	15.0	10.3	11.5
66A.8X9	8x9	188.5	156.0	15.0	15.0	12.6	13.85