



## AN - PROTWIST® giraviti per viti con intaglio - lama fresata

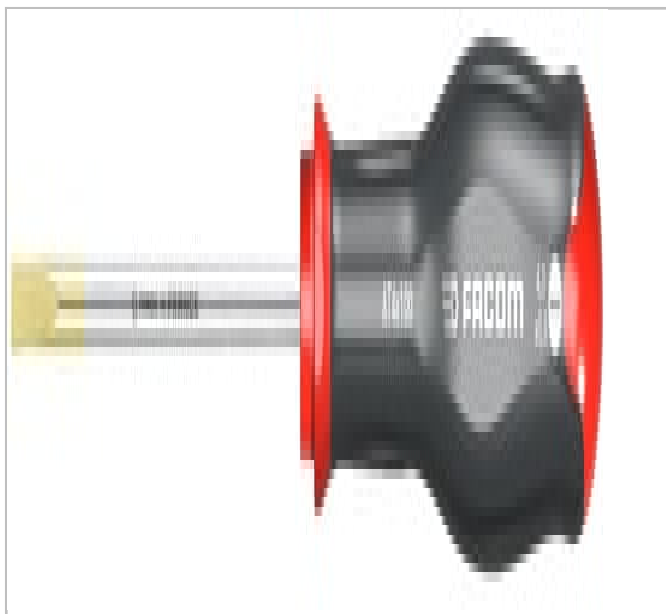

### Description:

- Blade " tri-coating " treatment (Zinc-Nickel-Chromium) - 4x Corrosion Resistance.[it]
- Handle 'Channel' - +10% Torque.[it]
- Handle Material - Softer for more Comfort and still Chemical Resistant.[it]
- Inline Hardening Process – +100% Tip Life and +100% Bar Strength. [it]
- CNC tip machining - gives better Screw Fit increasing Torque Transfer and Reducing Wear.[it]
- Laser Marking - gives virtually Permanent Marking.[it]
- Round shank for access in holes.[it]
- Extra-long shank up to 300 mm for difficult and remote access.[it]

	a [mm]	A [mm]	Diámetro [mm]	Diámetro D1 [mm]	Length L1 [mm]	Length L [mm]	Lunghezza L2 [mm]	Thickn ess E [mm]	Larghezza [mm]	Peso [g]
<b>AT2.5X50</b>	2.5	2.5	19.0	2.5	50.0	144.0	94.0	0.4	2.5	20.0
<b>AT2.5X75</b>	2.5	2.5	19.0	2.5	75.0	169.0	94.0	0.4	2.5	21.0
<b>AT2.5X75PB</b>		2.5	19.0	2.5	75.0	169.0	94.0	0.4	2.5	21.0
<b>AT2X75</b>	2.0	2.0	19.0	2.0	75.0	169.0	94.0	0.4	2.0	18.0
<b>AT3.5X100</b>	3.5	3.5	25.0	3.5	100.0	203.0	103.0	0.6	3.5	43.0
<b>AT3.5X100PB</b>		3.5	25.0	3.5	100.0	203.0	103.0	0.6	3.5	43.0
<b>AT3.5X250</b>	3.5	3.5	25.0	3.5	250.0	353.0	103.0	0.6	3.5	55.0
<b>AT3.5X75</b>	3.5	3.5	25.0	3.5	75.0	178.0	103.0	0.6	3.5	41.0
<b>AT3.5X75PB</b>		3.5	25.0	3.5	75.0	178.0	103.0	0.6	3.5	41.0
<b>AT3X100</b>	3.0	3.0	25.0	3.0	100.0	203.0	94.0	0.5	3.0	33.0
<b>AT3X75</b>	3.0	3.0	19.0	3.0	75.0	178.0	94.0	0.5	3.0	32.0
<b>AT4X100</b>	4.0	4.0	25.0	4.0	100.0	209.0	103.0	0.8	4.0	47.0
<b>AT4X100PB</b>		4.0	25.0	4.0	100.0	209.0	103.0	0.8	4.0	47.0
<b>AT4X150</b>	4.0	4.0	25.0	4.0	150.0	259.0	103.0	0.8	4.0	52.0
<b>AT4X200</b>	4.0	4.0	25.0	4.0	200.0	309.0	103.0	0.8	4.0	57.0
<b>AT4X300</b>	4.0	4.0	25.0	4.0	300.0	409.0	103.0	0.8	4.0	120.0
<b>AT5.5X100</b>	5.5	5.5	30.0	3.5	100.0	209.0	109.0	1.0	5.5	82.0
<b>AT5.5X100PB</b>		5.5	30.0	3.5	100.0	209.0	109.0	1.0	5.5	82.0
<b>AT5.5X125</b>	5.5	5.5	30.0	5.5	125.0	234.0	109.0	1.0	5.5	87.0
<b>AT5.5X150</b>	5.5	5.5	30.0	5.5	150.0	259.0	109.0	1.0	5.5	91.0
<b>AT5.5X150PB</b>		5.5	30.0	5.5	150.0	259.0	109.0	1.0	5.5	91.0
<b>AT5.5X200</b>	5.5	5.5	30.0	5.5	200.0	309.0	109.0	1.0	5.5	105.0
<b>AT5.5X300</b>	5.5	5.5	30.0	5.5	300.0	409.0	109.0	1.0	5.5	130.0
<b>AT6.5X125</b>	6.5	6.5	36.0	6.5	125.0	245.0	120.0	1.2	6.5	132.0
<b>AT6.5X150</b>	6.5	6.5	36.0	6.5	150.0	270.0	120.0	1.2	6.5	140.0
<b>AT6.5X150PB</b>		6.5	36.0	6.5	150.0	270.0	120.0	1.2	6.5	140.0
<b>AT6.5X200</b>	6.5	6.5	36.0	6.5	200.0	320.0	120.0	1.2	6.5	153.0

<b>AT6.5X300</b>	6.5	6.5	36.0	6.5	300.0	420.0	120.0	1.2	6.5	180.0
------------------	-----	-----	------	-----	-------	-------	-------	-----	-----	-------