

410 - "Connector" pliers




Standards:

ASME B107.500

Description:

- For handling fragile round components, e.g. screwed connector sleeves, tubes, lamps or wire looms, etc.
- Wide capacity from 3-position slip joint: max. diameter 55 mm.
- Replaceable plastic jaws available in 2 jaw hardness options: - 410: hard jaws - 70 shore B. - 410.S: soft jaws - 55 shore B.
- Finish: polished chrome, red PVC grips. Spare jaws: - 410.1: Set of 2 jaws with screws (hard). - 410.S1: Set of 2 jaws with screws (soft).

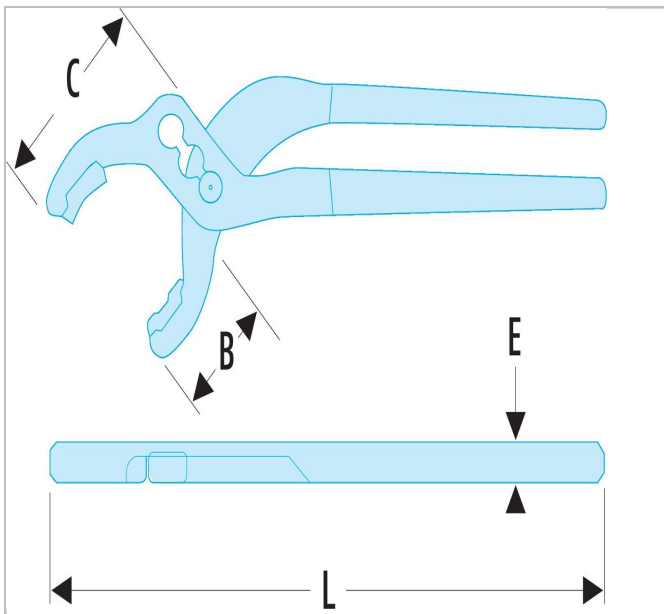

|  | Length L [mm] | Thickness E [mm] | Head Height C [mm] | Head Width B [mm] | Weight [g] |
|--|---------------|------------------|--------------------|-------------------|------------|
| 410.S | 230.0 | 10.0 | 47.0 | 68.0 | 320.0 |