


## AT - PROTWIST® screwdrivers for slotted head screws - milled blades

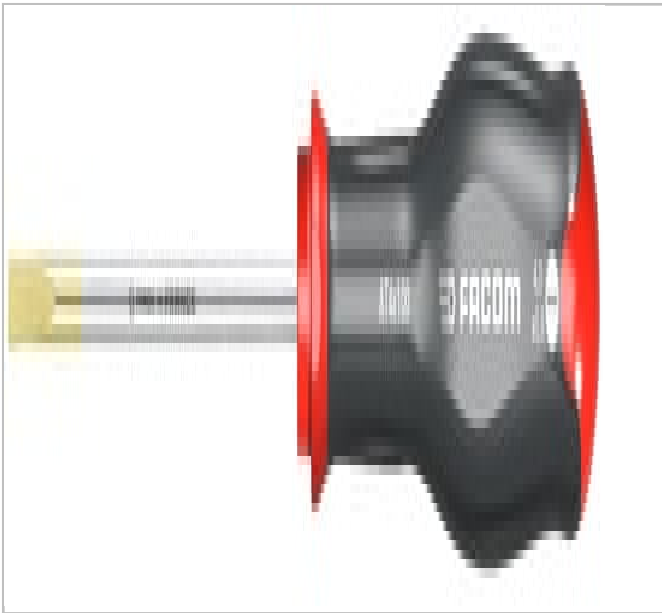


### Standards:

NF ISO 2380-1, NF ISO 2380-2,  
ISO 2380-1, ISO 2380-2, DIN ISO  
2380-1, DIN ISO 2380-2, ASME  
B107.600

### Description:

- Round shank for access in holes.
- Extra-long shank up to 300 mm for difficult and remote access.
- Inline Hardening Process – +100% Tip Life and +100% Bar Strength.
- Handle Material - Softer for more Comfort and still Chemical Resistant.
- Blade " tri-coating " treatment (Zinc-Nickel-Chromium) - 4x Corrosion Resistance.
- Handle 'Channel' - +10% Torque.
- Laser Marking - gives virtually Permanent Marking.
- CNC tip machining - gives better Screw Fit increasing Torque Transfer and Reducing Wear.

	A [mm]	Diameter [mm]	Diameter D1 [mm]	Length L1 [mm]	Length L [mm]	Length L2 [mm]	Thickness E [mm]	Width [mm]	Weight [g]
<b>AT2.5X50</b>	2.5	19.0	2.5	50.0	144.0	94.0	0.4	2.5	20.0
<b>AT2.5X75</b>	2.5	19.0	2.5	75.0	169.0	94.0	0.4	2.5	21.0
<b>AT2.5X75PB</b>	2.5	19.0	2.5	75.0	169.0	94.0	0.4	2.5	21.0
<b>AT2X75</b>	2.0	19.0	2.0	75.0	169.0	94.0	0.4	2.0	18.0
<b>AT3.5X100</b>	3.5	25.0	3.5	100.0	203.0	103.0	0.6	3.5	43.0
<b>AT3.5X100PB</b>	3.5	25.0	3.5	100.0	203.0	103.0	0.6	3.5	43.0
<b>AT3.5X250</b>	3.5	25.0	3.5	250.0	353.0	103.0	0.6	3.5	55.0
<b>AT3.5X75</b>	3.5	25.0	3.5	75.0	178.0	103.0	0.6	3.5	41.0
<b>AT3.5X75PB</b>	3.5	25.0	3.5	75.0	178.0	103.0	0.6	3.5	41.0
<b>AT3X100</b>	3.0	25.0	3.0	100.0	203.0	94.0	0.5	3.0	33.0
<b>AT3X75</b>	3.0	19.0	3.0	75.0	178.0	94.0	0.5	3.0	32.0
<b>AT4X100</b>	4.0	25.0	4.0	100.0	209.0	103.0	0.8	4.0	47.0
<b>AT4X100PB</b>	4.0	25.0	4.0	100.0	209.0	103.0	0.8	4.0	47.0
<b>AT4X150</b>	4.0	25.0	4.0	150.0	259.0	103.0	0.8	4.0	52.0
<b>AT4X200</b>	4.0	25.0	4.0	200.0	309.0	103.0	0.8	4.0	57.0
<b>AT4X300</b>	4.0	25.0	4.0	300.0	409.0	103.0	0.8	4.0	120.0
<b>AT5.5X100</b>	5.5	30.0	3.5	100.0	209.0	109.0	1.0	5.5	82.0
<b>AT5.5X100PB</b>	5.5	30.0	3.5	100.0	209.0	109.0	1.0	5.5	82.0
<b>AT5.5X125</b>	5.5	30.0	5.5	125.0	234.0	109.0	1.0	5.5	87.0
<b>AT5.5X150</b>	5.5	30.0	5.5	150.0	259.0	109.0	1.0	5.5	91.0
<b>AT5.5X150PB</b>	5.5	30.0	5.5	150.0	259.0	109.0	1.0	5.5	91.0
<b>AT5.5X200</b>	5.5	30.0	5.5	200.0	309.0	109.0	1.0	5.5	105.0
<b>AT5.5X300</b>	5.5	30.0	5.5	300.0	409.0	109.0	1.0	5.5	130.0
<b>AT6.5X125</b>	6.5	36.0	6.5	125.0	245.0	120.0	1.2	6.5	132.0
<b>AT6.5X150</b>	6.5	36.0	6.5	150.0	270.0	120.0	1.2	6.5	140.0
<b>AT6.5X150PB</b>	6.5	36.0	6.5	150.0	270.0	120.0	1.2	6.5	140.0
<b>AT6.5X200</b>	6.5	36.0	6.5	200.0	320.0	120.0	1.2	6.5	153.0
<b>AT6.5X300</b>	6.5	36.0	6.5	300.0	420.0	120.0	1.2	6.5	180.0

