



NS.LA - Impact-doppen 1/2" 6-kant lang, metrische maten



Description:

- Voor uw veiligheid: gebruik de impact-doppen met de bijpassende ringen en borgpennen.

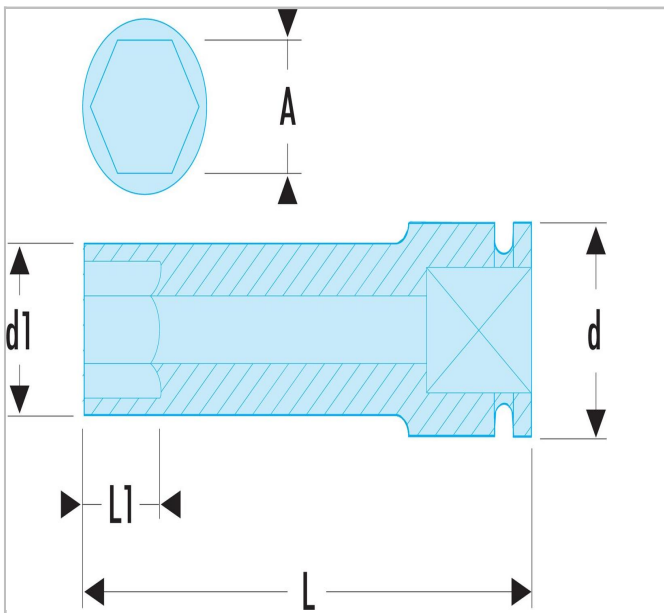

	a [mm]	A [mm]	A [°]	Diameter [mm]	Diameter D1 [mm]	Lengte [mm]	Lengte L1 [mm]	Gewicht [g]	Hex [mm]	Hoogte H3 [mm]
NS.10LA	12.0	12.0		24.0	20.0	78.0	21.0	165.0	6.0	
NS.11LA	11.0	11.0		24.0	18.0	78.0	21.0	160.0	6.0	
NS.12LA	12.0	12.0		24.0	20.0	78.0	21.0	165.0	6.0	
NS.13LA	13.0	13.0		24.0	21.0	78.0	21.0	185.0	6.0	
NS.14LA	14.0	14.0		24.0	22.0	78.0	21.0	200.0	6.0	
NS.16LA	16.0	16.0		24.0	24.0	78.0	21.0	220.0	6.0	
NS.17LA	17.0	17.0		26.0	26.0	78.0	21.0	250.0	6.0	
NS.18LA	18.0	18.0		25.0	28.0	78.0	21.0	275.0	6.0	
NS.19LA	19.0	19.0		25.0	28.0	78.0	21.0	270.0	6.0	
NS.21LA	21.0	21.0		25.0	30.0	78.0	21.0	280.0	6.0	
NS.22LA	22.0	22.0		30.0	32.0	78.0	24.0	290.0	6.0	
NS.23LA	23.0	23.0		30.0	34.0	78.0	24.0	300.0	6.0	
NS.24LA	24.0	24.0		30.0	34.0	78.0	24.0	300.0	6.0	
NS.26LA	26.0	26.0		30.0	36.0	78.0	24.0	305.0	6.0	
NS.27LA	27.0	27.0		30.0	38.0	78.0	24.0	310.0	6.0	
NS.28LA	28.0	28.0		30.0	40.0	78.0	24.0	315.0	6.0	24.0
NS.29LA	29.0	29.0		30.0	40.0	78.0	24.0	330.0	6.0	
NS.30LA	30.0	30.0		30.0	42.0	78.0	24.0	340.0	6.0	
NS.32LA	32.0	32.0		30.0	44.0	78.0	24.0	340.0	6.0	
NS.8LA	8.0	8.0		24.0	15.0	78.0	21.0	130.0	6.0	