

AW - PROTWIST® screwdrivers for slotted head screws - hexagonal blades





Standards:

NF ISO 2380-1, NF ISO 2380-2, ISO 2380-1, ISO 2380-2, DIN ISO 2380-1, DIN ISO 2380-2, ASME B107.600

Description:

- Hexagonal blade for optimum reliability and performance.
- Extra-long shank up to 250 mm for difficult and remote access.
- Silicon carbon blade: strong and resistant to flexion.
- Bi-material grip resists to impacts, abrasion, and chemicals.
- Finish: black tipped mat chromed blade.

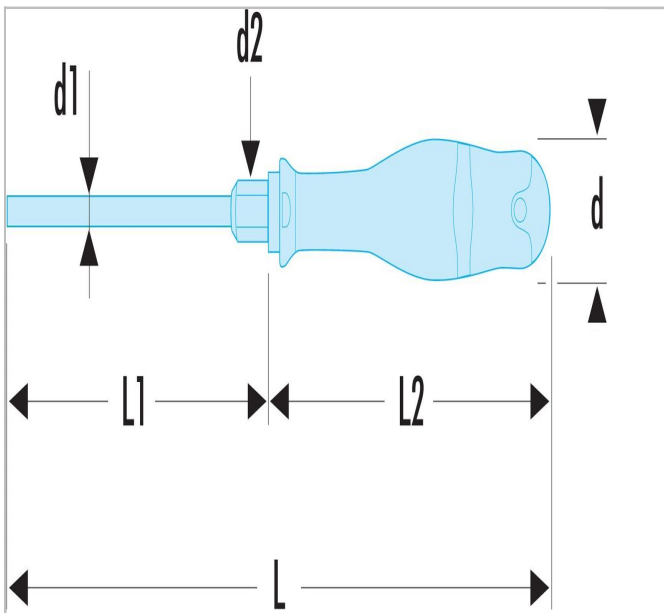

	A [mm]	Diameter [mm]	Diameter D1 [mm]	Length L1 [mm]	Length L [mm]	Length L2 [mm]	Thickness E [mm]	Width [mm]	Weight [g]
ATW4X100CK	4.0	25.0	4.1	100.0	204.0	104.0	0.8		57.0
ATW4X100CK PB	4.0	25.0	4.1	100.0	204.0	104.0	0.8		57.0
ATWH10X175	10.0	40.0	9.0	175.0	300.0	125.0	1.6	10.0	320.0
ATWH10X175P B	10.0	40.0	9.0	175.0	300.0	125.0	1.6	10.0	320.0
ATWH12X250	12.0	40.0	10.0	250.0	375.0	125.0	2.0	12.0	375.0
ATWH8X175	8.0	40.0	7.0	175.0	300.0	125.0	1.2	8.0	160.0
ATWH8X175P B	8.0	40.0	7.0	175.0	300.0	125.0	1.2	8.0	160.0