



## 265.SR - Flachmeißel, funkenfrei



### Beschreibung:

- Spezielle funkenfreie und antimagnetische Berylliumkupferlegierung.

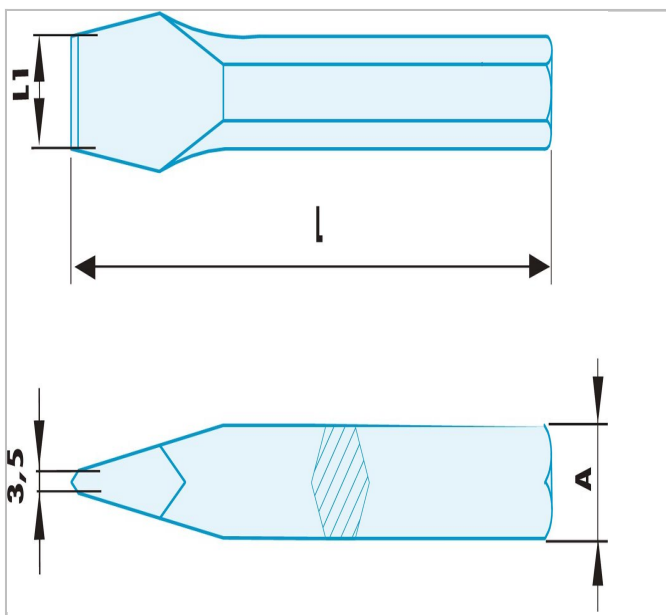

|  | a [mm] | A [mm] | A [mm] | Länge [mm] | Länge L1 [mm] | Gewicht [g] |
|--|--------|--------|--------|------------|---------------|-------------|
| <b>263.30SR</b>  | 25.0   | 25.0   |        | 300.0      | 28.0          | 1200.0      |
| <b>263.32SR</b>  | 30.0   | 30.0   |        | 300.0      | 35.0          | 2900.0      |
| <b>265.20SR</b>  | 10.0   | 10.0   |        | 150.0      | 12.0          | 100.0       |
| <b>265.22SR</b>  | 12.0   | 12.0   |        | 160.0      | 14.0          | 240.0       |
| <b>265.24SR</b>  | 14.0   | 14.0   |        | 200.0      | 16.0          | 250.0       |
| <b>265.26SR</b>  | 16.0   | 16.0   |        | 160.0      | 18.0          | 260.0       |
| <b>265.28SR</b>  | 17.0   | 17.0   |        | 350.0      | 19.0          | 900.0       |
| <b>265.29SR</b>  | 22.0   | 22.0   |        | 600.0      | 24.0          | 1800.0      |