



75.SR - Non sparking metric angled socket wrenches



Description:

- Special non sparking and anti-magnetic Copper-Beryllium alloy.

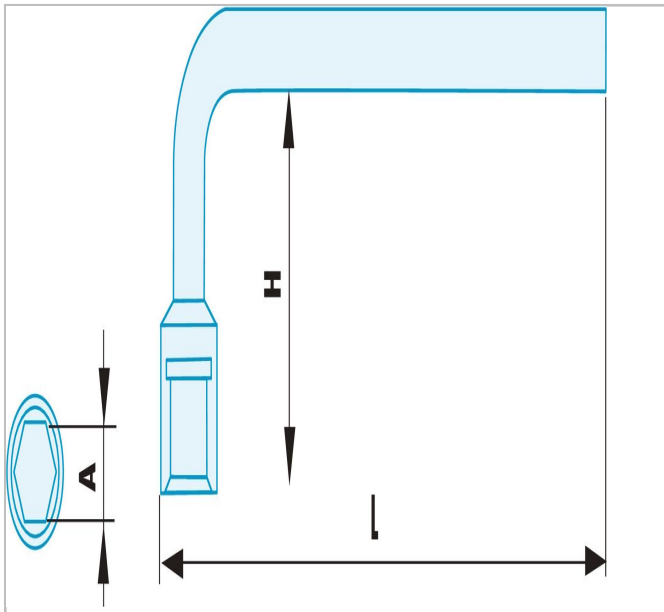

|  | A [mm] | Length L [mm] | Height H [mm] | Weight [g] |
|--|--------|---------------------|---------------------|---------------|
| 75.10SR | 10.0 | 168.0 | 37.0 | 200.0 |
| 75.12SR | 12.0 | 216.0 | 42.0 | 220.0 |
| 75.13SR | 13.0 | 240.0 | 45.0 | 250.0 |
| 75.14SR | 14.0 | 245.0 | 45.0 | 300.0 |
| 75.15SR | 15.0 | 250.0 | 48.0 | 350.0 |
| 75.16SR | 16.0 | 255.0 | 48.0 | 500.0 |
| 75.17SR | 17.0 | 260.0 | 51.0 | 550.0 |
| 75.18SR | 18.0 | 265.0 | 53.0 | 550.0 |
| 75.19SR | 19.0 | 270.0 | 55.0 | 550.0 |
| 75.21SR | 21.0 | 275.0 | 57.0 | 750.0 |
| 75.22SR | 22.0 | 278.0 | 59.0 | 750.0 |
| 75.23SR | 23.0 | 282.0 | 60.0 | 800.0 |
| 75.24SR | 24.0 | 286.0 | 63.0 | 850.0 |
| 75.27SR | 27.0 | 294.0 | 69.0 | 900.0 |
| 75.30SR | 30.0 | 302.0 | 75.0 | 1000.0 |
| 75.32SR | 32.0 | 310.0 | 81.0 | 1100.0 |