



## 49.SR - Non sparking metric impact open end wrenches



### Description:

- Special non sparking and anti-magnetic Copper-Beryllium alloy.

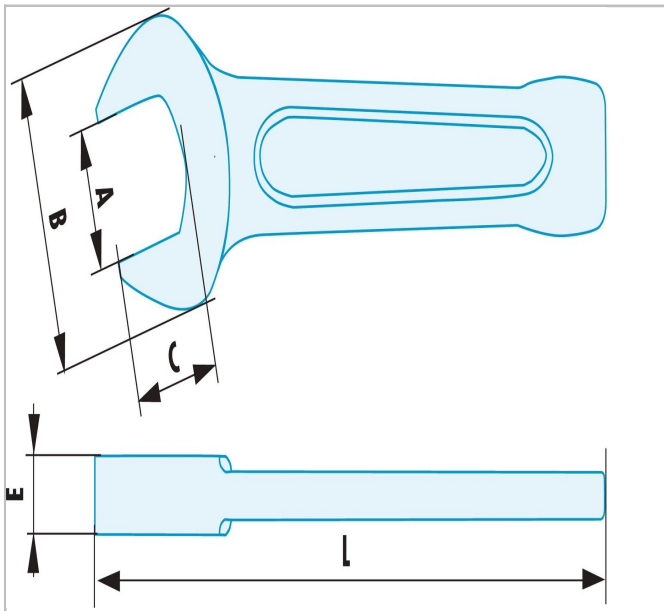

	A [mm]	Length L [mm]	Thickness E [mm]	Head Height C [mm]	Head Width B [mm]	Weight [g]
<b>49.17SR</b>	17.0	125.0	11.0	19.0	40.5	150.0
<b>49.19SR</b>	19.0	125.0	11.0	19.0	40.5	150.0
<b>49.22SR</b>	22.0	135.0	12.0	22.0	46.0	195.0
<b>49.24SR</b>	24.0	150.0	12.0	24.0	50.0	245.0
<b>49.27SR</b>	27.0	175.0	15.0	27.0	57.0	335.0
<b>49.30SR</b>	30.0	190.0	16.0	30.0	64.0	435.0
<b>49.32SR</b>	32.0	190.0	16.0	32.0	66.0	515.0
<b>49.36SR</b>	36.0	210.0	18.0	36.0	75.0	725.0
<b>49.41SR</b>	41.0	230.0	18.5	41.0	87.0	955.0
<b>49.46SR</b>	46.0	250.0	20.0	46.0	98.0	1200.0
<b>49.50SR</b>	50.0	275.0	20.5	50.0	108.0	1300.0
<b>49.55SR</b>	55.0	305.0	23.0	55.0	117.0	1700.0
<b>49.60SR</b>	60.0	315.0	23.5	60.0	128.0	2200.0
<b>49.65SR</b>	65.0	335.0	27.5	65.0	141.0	2700.0
<b>49.70SR</b>	70.0	370.0	28.5	70.0	156.0	3300.0
<b>49.75SR</b>	75.0	375.0	29.0	75.0	162.0	3700.0
<b>49.90SR</b>	90.0	445.0	36.0	90.0	194.0	6700.0