

39 - Metric short-reach combination wrenches





Standards:

NF ISO 691, NF ISO 7738, NF ISO 3318, NF ISO 1711-1, E74-306, ISO 691, ISO 7738, ISO 3318, ISO 1711-1, DIN ISO 691, DIN 1711-1, ASME B107.100

Description:

- Short combination wrenches: the short handle and compact head allow for high handiness. Ideal for confined access.
- OGV® profile with 12-point ring for powerful tightening while protecting the nut. H suffix = 6-point ring.
- Ring head angled at 15°.
- Open end head angled at 15°.
- Metric sizes: 3.2 to 17 mm.
- Presentation: satin chrome finish.

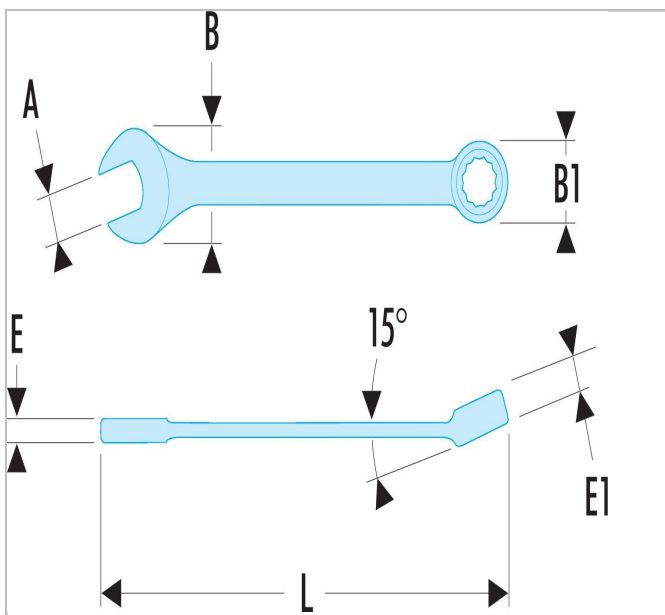

	A [mm]	Length L [mm]	Thickness E [mm]	Thickness E1 [mm]	Head Width B [mm]	Weight [Kg]	Hex Size [mm]
39.10	10.0	103.0	5.1	6.4	21.5	0.03	12.0
39.11	11.0	109.0	5.3	6.8	23.7	0.035	12.0
39.12	12.0	127.0	5.5	7.5	26.0	0.05	12.0
39.13	13.0	141.0	5.8	8.0	28.0	0.055	12.0
39.14	14.0	147.0	6.0	8.5	30.2	0.07	12.0
39.15	15.0	152.0	6.4	9.0	32.3	0.08	12.0
39.16	16.0	158.0	6.7	9.6	34.4	0.09	12.0
39.17	17.0	165.0	6.9	10.0	36.5	0.1	12.0
39.3.2H	3.2	77.0	3.1	3.1	10.0	0.01	6.0
39.4H	4.0	77.0	3.1	3.1	10.0	0.01	6.0
39.5.5H	5.5	84.0	3.5	4.0	11.8	0.015	6.0
39.5H	5.0	82.0	3.5	4.0	11.8	0.01	6.0
39.6	6.0	90.0	4.1	5.0	15.0	0.015	12.0
39.7	7.0	90.0	4.1	5.0	15.0	0.015	12.0
39.8	8.0	94.0	4.5	5.8	17.2	0.02	12.0
39.9	9.0	98.0	4.8	6.0	19.4	0.025	12.0